




## TITAN 100 ⚡ 12/24V 🔌 70A

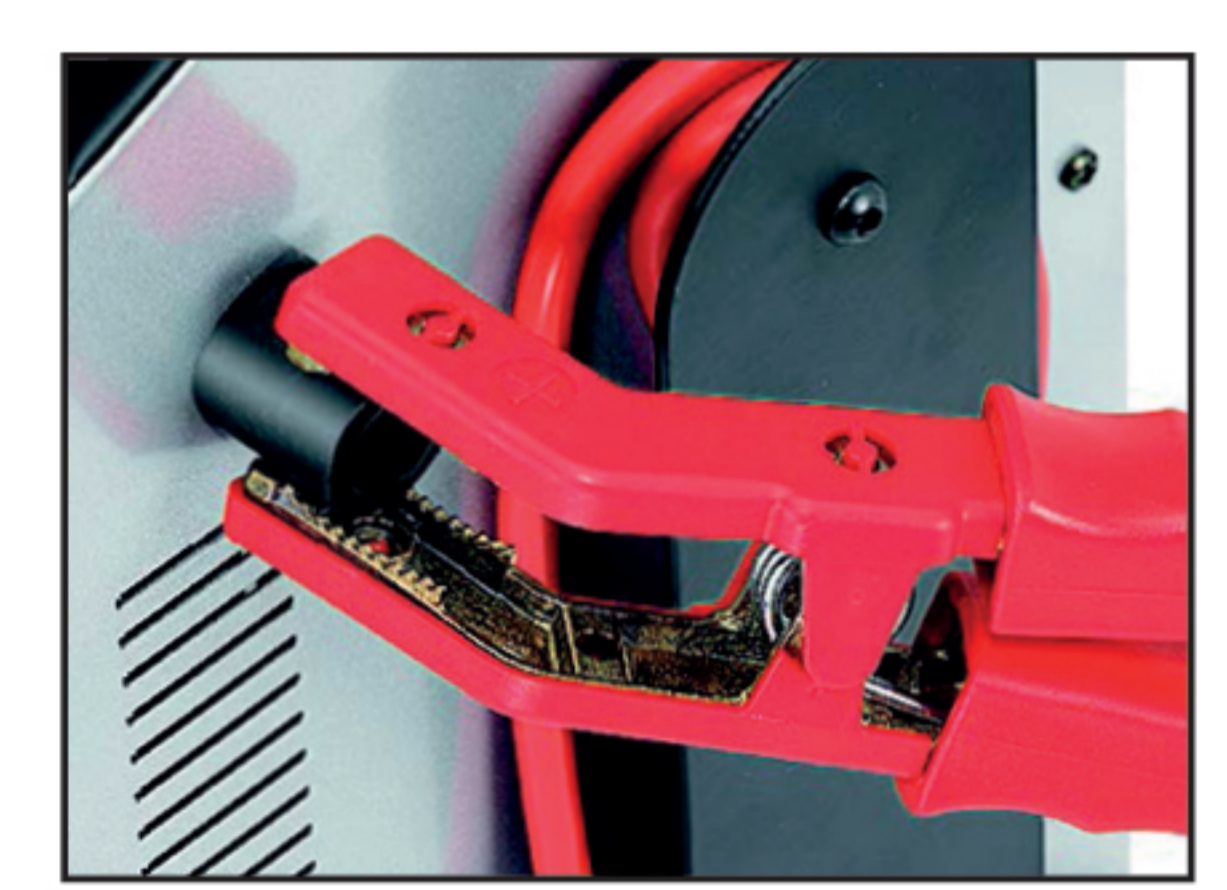

+++

3 programmed charge cycles and a manual cycle

Sulfate deposit removal and Recovery

Built-in electronic protection

10 phases of charge cycle

Constant analysis

Ideal for Start n' Stop and Spiral batteries

Potentiometer for regulating the charge current


Supply Function

Specific charge processes WET - SPIRAL/GEL-AGM

Electronic control system

Dual voltage 12/24V

Remote control for start engine mode

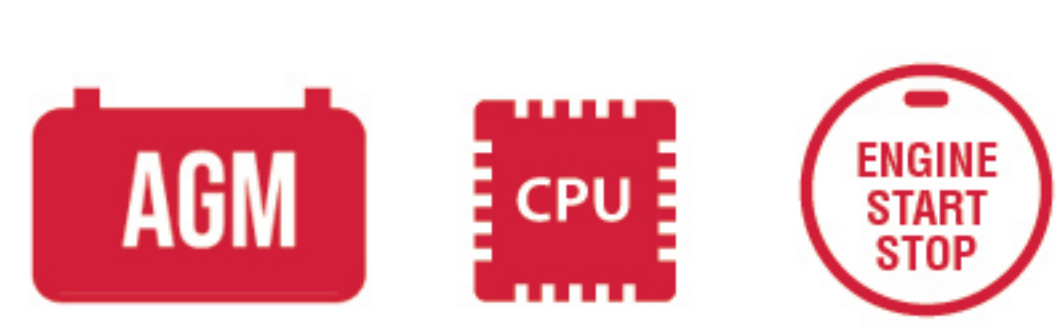

# THE TITAN RANGE



TITAN 60

TITAN 75

TITAN 100

## TECHNICAL INFORMATION

MODEL	TITAN 60	TITAN 75	TITAN 100
PART NUMBER	815701300	815701400	815701500
OUTPUT VOLTAGE (DC)	12/24 V	12/24 V	12/24 V
CHARGE CURRENT	1A ▶ 40 A (60 A - Eff.)	1A ▶ 50 A (75 A - Eff.)	1A ▶ 70 A (100 A - Eff.)
STARTING CURRENT	350 PA - 250 CA	400 PA - 300 CA	650 PA - 450 CA
COMPATIBLE BATTERIES	PB - WET - GEL - AGM SPIRAL - MF - VRLA	PB - WET - GEL - AGM SPIRAL - MF - VRLA	PB - WET - GEL - AGM SPIRAL - MF - VRLA
RECHARGE CAPACITY	4-450 Ah	4-550 Ah	4-700 Ah



## PACKAGING INFORMATION

MODEL	TITAN 60	TITAN 75	TITAN 100
NET WEIGHT	18 kg	22 kg	28 kg
DIMENSIONS (L X W X H / MM)	600 x 275 x 305	760 x 300 x 370	760 x 300 x 370



Since  
1947

Rue de la Baronnerie, 3  
4920 Harzé - Belgium

info-be@schumacherelectric.com  
www.schumachereurope.com

+32 4 388 20 17

@schumacherboosters