




JUMP STARTER SOS BOOSTER® SOS 12/24/28V-1200CA

APPLISCATIONS

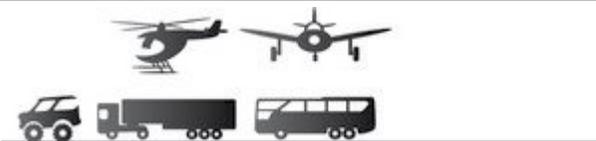

MOTOR	
Vehicle	12V, 24V & 28V
Gasoline	✓
Diesel	✓
Kerosene	✓

TYPE OF RECOVERY
12V, 24V or 28V vehicles: INTENSIVE
Successive jump starts, several times during the day
Jump start of vehicles' fleets
Normal conditions of use



The correct use of a Ceteor Booster cannot cause any damage to the electronic of a vehicle..

Ceteor booster packs are perfectly compatible with hybrid vehicles.

TYPE OF VEHICLES TO BE JUMP STARTED
12V propeller plane
Turboprop and piston aircraft
Small 12V or 24V turbine and piston helicopters
28V turbines
New or second-hand busses, shuttles and coaches
New and second-hand car, 4 Wd, commercial vehicle
New or second-hand trucks

Diesel motors up to*:

- Normal
- Intensive



Following the principle "who can do more can do less" our most powerful battery boosters can also be convenient for the applications covered by less powerful battery boosters with same voltage of our range.

Caution :

The circumstances/conditions when starting a vehicle depend of various parameters: vehicle's condition, engine type (petrol or diesel) and power, presence of battery in vehicle or not, temperature, frequency of use ... Those influence the jump start's facility. *Chart for your information - Manufacturer's advice.*

TECHNICAL SPECIFICATIONS

Reference	760010
Voltage	12/24/28V
Cranking Amps	1200 A
Peak Amps	3100 A
Nr of batteries	3
AC/DC* charger	4A
Cable to charge DC/12V	✗
12V Output	✗
Reverse polarity signal	✓
Internal fuse	500 A
Connector for auxiliary cables	✓
Net weight	22,2 kg
Dimensions (cm)	53 x 16 x 48

- ✓ Yes
- ✗ No
- Option
- Upon request

STANDARD EQUIPMENT	
	<p>LED CLAMPS</p> <p>The blue clamp is equipped with a led (lamp) for an easier and safer use, especially in the dark.</p>
	<p>SWITCH & BUZZER</p> <p>This booster is equipped with a switch and a reverse polarity signal to improve security during use and a polarity reverse signal.</p>